

SPECIFICATIONS	
SHELL WEIGHT:	2800 LBS.
WATER WEIGHT:	9978 LBS.
TOTAL SHELL & WATER WEIGHT:	12777.7 LBS.
WATER VOLUME:	200 Cu.Ft.
WATER GALLONS:	1496 GAL.
SURFACE AREA:	78.5 SQ. FT.
ICC ES LISTED #:	PMG-1161

NESPA ENTERPRISES, Inc.



ICC ES Listed  
PMG-1161

WATERPROOF SKID SUPPORT STRUCTURE ATTACHED TO SPA AT NESPA FACTORY

\*SKIDS SUPPLIED BY NESPA

**LIGHT NICHE**

SPA BRIGHT, 120 V, 100 WATT, 50' CORD, U.L. APPROVED

**MAIN DRAIN**

AquaStar 32CDFLFR, 32" Channel Drain, Approved Max Flow Rate: Floor = 236 GPM @ 3.4 fps Wall = 136 GPM @ 1.9 fps Complies w/ ANSI / ASME A112.19.8 & NSF / ANSI 16-2011

**MAIN DRAIN SUMP**

Nespa Aquastar Approved Sump IAPMO Approval # SP4900

**SIDEWALL SUCTION**

AquaStar WAV9, 9" X 9" Frame, Approved Max Flow Rate: Floor = 316 GPM Wall = 208 GPM Complies w/ ANSI / ASME A112.19.8 & NSF / ANSI 16-2011

**SIDEWALL SUMP**

Nespa Aquastar Approved Sump IAPMO Approval # SP4900

**EQUALIZER**

6" Round Hockey Puck AquaStar 6HPHAXXX Sumpless Suction Outlet Floor 177 GPM Wall 122 GPM Complies w/ ANSI / ASME A112.19.8 & NSF / ANSI 16-2011

**SKIMMER**

HAYWARD SP-1084FVE SURFACE SKIMMER W/ EQUALIZERS, NSF / ANSI 50-2012

**JET**



HYDRO INLETS 1-1/2" WATER - 1-1/2" AIR HYDROAIR #10-5100 COMPLIES W/ ANSI CODE ASME A112.19.8-07 UL APPROVED

**RETURN**

INLET FITTINGS 1-1/2" WALL TYPE W/ EYEBALL HYDROAIR #10-3500 COMPLIES W/ ANSI CODE ASME A112.19.8-07 UL APPROVED

**FILL**

INLET FITTINGS 1-1/2" WALL TYPE W/ EYEBALL HYDROAIR #10-3500 COMPLIES W/ ANSI CODE ASME A112.19.8-07 UL APPROVED

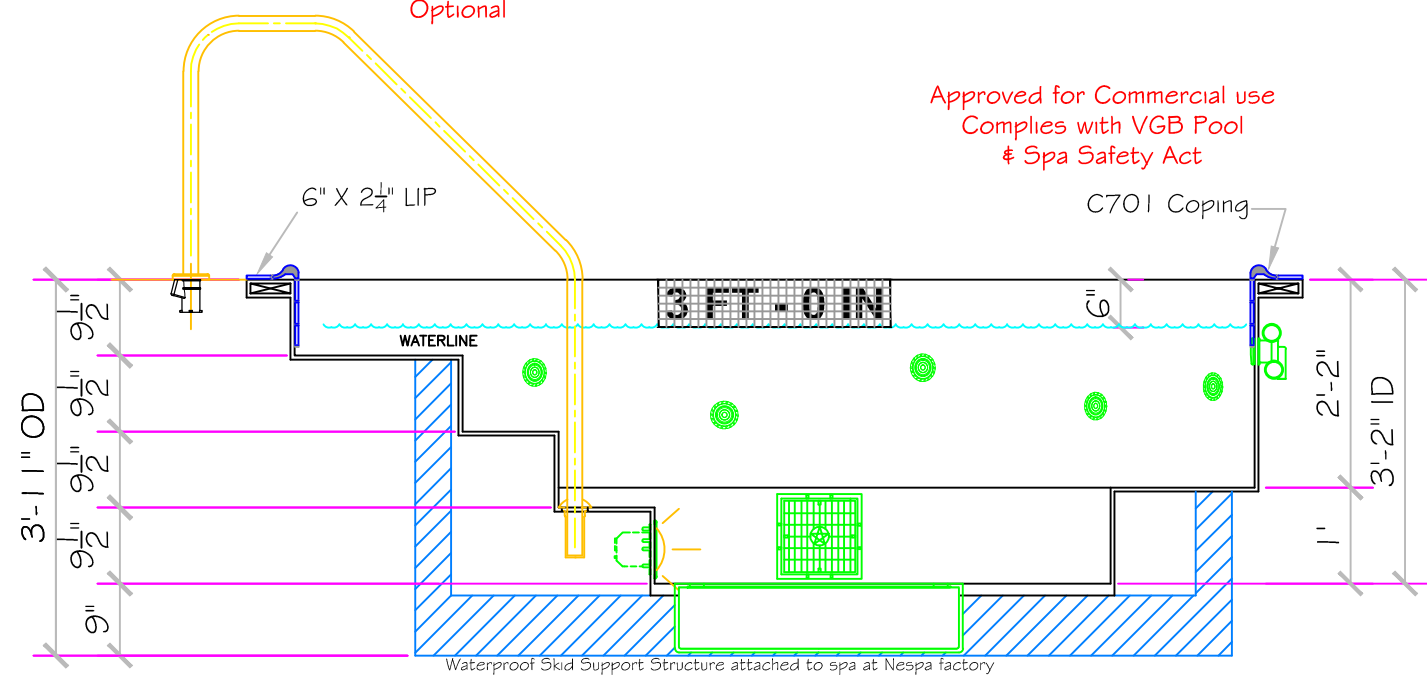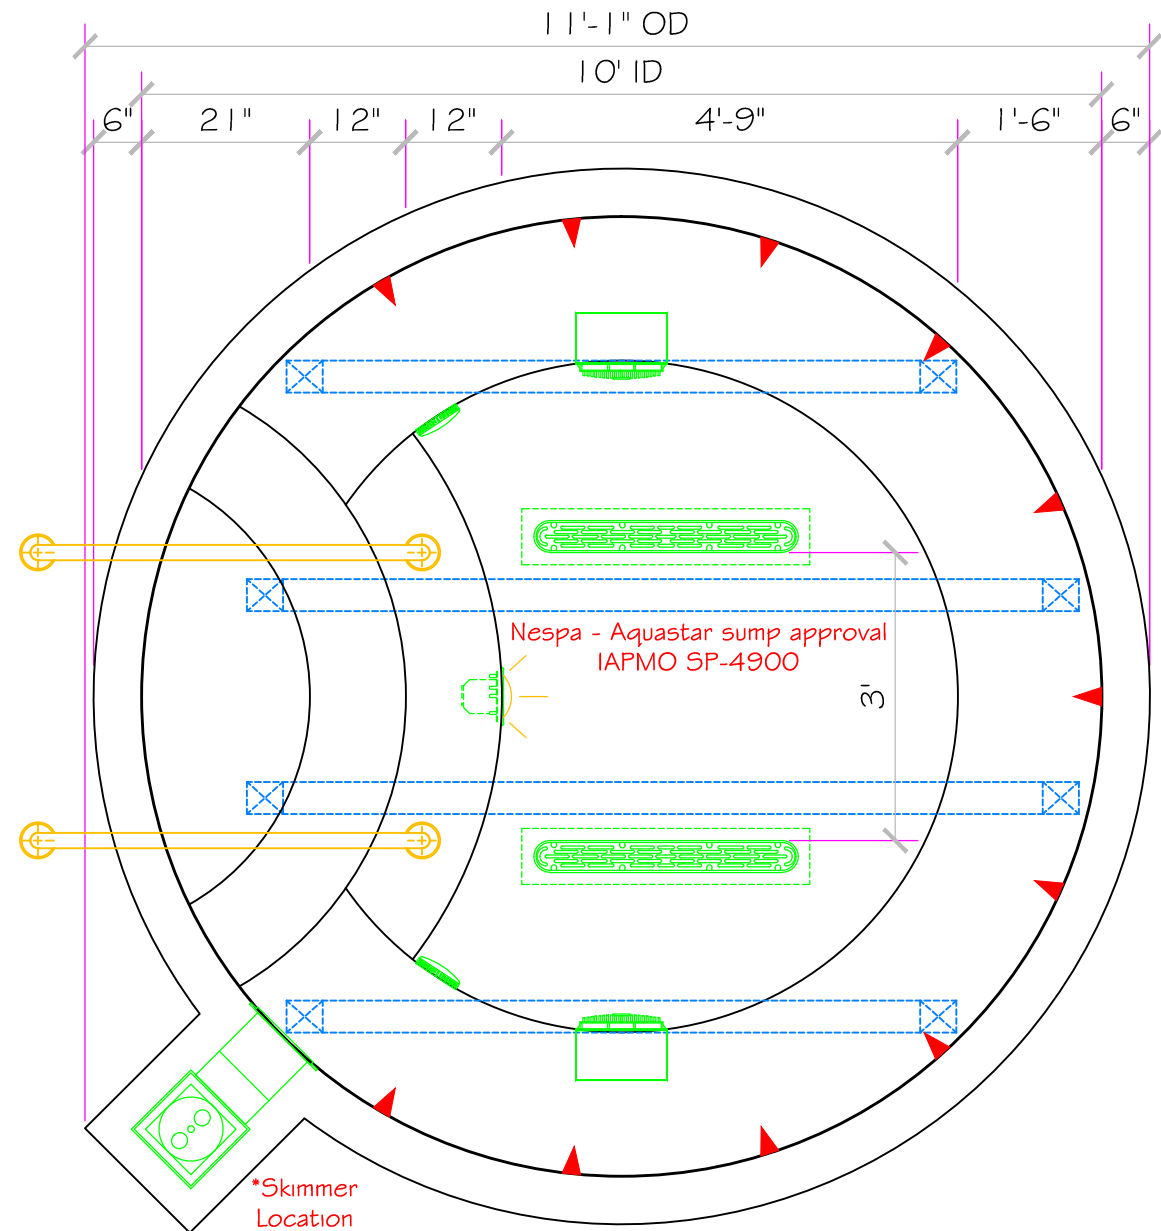

Approved for Commercial use  
Complies with VGB Pool  
& Spa Safety Act

Waterproof Skid Support Structure attached to spa at Nespa factory

